



Standard

Adapter



PWR-C66-5V2A-CN



PWR-C66-5V2A-EU



PWR-C66-5V2A-UK



PWR-C66-5V2A-US

Adapter(CN/EU/UK/US), I/P: 100-240V, O/P: 5V2A, use with DC-BK-TypeC cable

QC Adapter



PWR-18W-CN



PWR-18W-EU



PWR-18W-UK



PWR-18W-US

Quick Charge adapter(CN/EU/UK/US), I/P: 100-240V, O/P: 5V3A/12V1.5A/9V2A, use with DC-BK-TypeC cable
 Comment: standard adaptor and QC adaptor are alternative.

USB Cable




DC-BK-TypeC
1.0 meter Type-C cable

Battery



BTRY-C66-43MA
4300mAh Li-Ion battery, 3.8V output

Lanyard

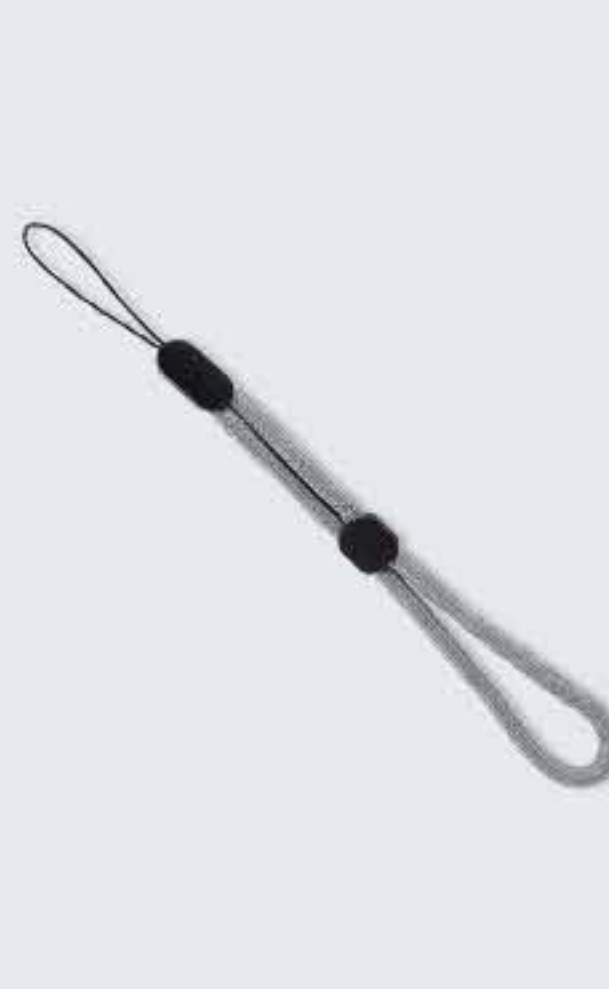

SG-C66-LYD-GY
Lanyard, grey

Optional

Rugged Rubber Boot



RB-C66-RR/RB-C66-RRP

Rugged Rubber Boot only, omni-directional protected.

RB-C66-RR does not support charging cradle.

RB-C66-RRP is pre installed with Type C & Pogo Pin I/O connector, then it supports CRD-C66-RBC/CRD-C66-RBCE charging cradle.



RB-C66-RRH/RB-C66-RRHP

Rugged Rubber Boot with hand strap, omni-directional protected.

RB-C66-RRH does not support charging cradle.

RB-C66-RRHP is pre installed with Type C & Pogo Pin I/O connector, then it supports CRD-C66-RBC/CRD-C66-RBCE charging cradle.



RB-C66-RRC/RB-C66-RRCP

Rugged Rubber Boot with belt clip, omni-directional protected.

RB-C66-RRC does not support charging cradle.

RB-C66-RRCP is pre installed with Type C & Pogo Pin I/O connector, then it supports CRD-C66-RBC/CRD-C66-RBCE charging cradle.



RB-C66-P

Type C & Pogo Pin I/O Connector, to be mounted with the rugged rubber boot, enable it to support charging cradle(CRD-C66-RBC/RBCE).The wired network is available when the rugged rubber boot is placed on the cradle(CRD-C66-RBCE).

Charging Cradles & Adapters



CRD-C66-MBC
Charging Cradle for main battery, up to 4 slots, use with DCPWR-12V2A-XX adapter.



CRD-C66-PBC
Charging Cradle for pistol battery, up to 2 slots, use with DCPWR-12V2A-XX adapter.



CRD-C66-DP
C66 charging cradle, only for device with pistol grip or device with UHF, use with DCPWR-12V2A-XX adapter.



CRD-C66-INS



CRD-C66-RBC



CRD-C66-RBCE



CN



UK



EU



US

CRD-C66-RBC/CRD-C66-RBCE
Charging Cradle for device, use with DCPWR-12V2A-XX adapter. CRD-C66-RBCE is an advanced CRD-C66-RBC, w/sync, w/ethernet, w/DC. The cradle cup has an insert that must be removed prior to inserting the C66 with Rugged Boot.

DCPWR-12V2A-XX
Adapter(CN/EU/UK/US), I/P: 100-240V, O/P: 12V2A, DC



CRD-MCB

The base of 4-slots charging cradle set for 4 pieces of cradle, use with DCPWR-12V5A-XX adapter.

For load balance, recommendation:

1. 4 x cradle for device
2. 3 x cradle for device + 1 x cradle for main battery
3. 2 x cradle for device + 1 x cradle for main battery + 1 x cradle for pistol battery

Vehicle Cradle



CRD-C66-VC
Vehicle Charging Cradle, with type-C, use with DC-BK-TypeC cable. Car holder and car adapter need to be purchased separately

Rubber Bumper



RB-C66-PR
Protective rubber bumper, upper and lower
4 pcs M1.6 screws are necessary.

Hand Strap



RB-C66-HS
Hand strap with buckle
2 pcs M1.6 screws are necessary.

Screen Protector



SP-C66
Tempered glass screen protector

Pistol Grip



RB-C66-PS
Snap-On Trigger Handle and Rugged Boot Kit, use with optional pistol battery
4 pcs M1.6 screws are necessary.



BTY-C66-PB
Pistol battery, 5200mAh

